

---

# Using Digital Photogrammetry to Determine Vehicle Crush and Equivalent Barrier Speed (EBS)

Stephen Fenton, Wendy Johnson, James LaRocque,  
Nathan Rose and Richard Ziernicki  
Knott Laboratory

Reprinted From: Accident Reconstruction: Technology and Animation IX  
(SP-1407)

The appearance of this ISSN code at the bottom of this page indicates SAE's consent that copies of the paper may be made for personal or internal use of specific clients. This consent is given on the condition, however, that the copier pay a \$7.00 per article copy fee through the Copyright Clearance Center, Inc. Operations Center, 222 Rosewood Drive, Danvers, MA 01923 for copying beyond that permitted by Sections 107 or 108 of the U.S. Copyright Law. This consent does not extend to other kinds of copying such as copying for general distribution, for advertising or promotional purposes, for creating new collective works, or for resale.

SAE routinely stocks printed papers for a period of three years following date of publication. Direct your orders to SAE Customer Sales and Satisfaction Department.

Quantity reprint rates can be obtained from the Customer Sales and Satisfaction Department.

To request permission to reprint a technical paper or permission to use copyrighted SAE publications in other works, contact the SAE Publications Group.



**GLOBAL MOBILITY DATABASE**

All SAE papers, standards, and selected books are abstracted and indexed in the Global Mobility Database

No part of this publication may be reproduced in any form, in an electronic retrieval system or otherwise, without the prior written permission of the publisher.

**ISSN 0148-7191**

**Copyright 1999 Society of Automotive Engineers, Inc.**

Positions and opinions advanced in this paper are those of the author(s) and not necessarily those of SAE. The author is solely responsible for the content of the paper. A process is available by which discussions will be printed with the paper if it is published in SAE Transactions. For permission to publish this paper in full or in part, contact the SAE Publications Group.

Persons wishing to submit papers to be considered for presentation or publication through SAE should send the manuscript or a 300 word abstract of a proposed manuscript to: Secretary, Engineering Meetings Board, SAE.

**Printed in USA**

# Using Digital Photogrammetry to Determine Vehicle Crush and Equivalent Barrier Speed (EBS)

Stephen Fenton, Wendy Johnson, James LaRocque,  
Nathan Rose and Richard Ziernicki  
Knott Laboratory

Copyright © 1999 Society of Automotive Engineers, Inc.

## ABSTRACT

This paper presents a method of determining a vehicle crush and equivalent barrier speed using digital photogrammetry. A state-of-the-art documentation technique called close-range photogrammetry allows engineers and accident reconstructionists to create three-dimensional computer models of damaged vehicles utilizing photographs. Utilizing photogrammetric software, engineers can digitize accident scene photographs to create accurate three-dimensional computer models of the vehicles, which can be used to quantify structural damage sustained by the vehicles. Crush deformation can be quantified utilizing this process and the resulting crush dimensions can be input into engineering software to determine a vehicle's equivalent barrier speed. Knott Laboratory, Inc. has utilized these techniques on cases worldwide including the Princess Diana accident in France [1][2].

## INTRODUCTION

For a number of years, the ability to determine equivalent barrier speed based on vehicle crush has been available. In the past, engineers would inspect a vehicle and physically document the extent of crush using tape measures. In order to measure the crush, the vehicle had to be available for inspection; however, many times the vehicle had either been repaired or destroyed, and the only evidence of crush had been recorded on photographs. Utilizing close-range photogrammetry, the amount of crush now can be quantified as it could have been if the vehicle were physically available. It is no longer necessary to make an estimation of the vehicle's speed by just reviewing photographs of the vehicle and approximating the amount of crush. Close-range photogrammetry can be utilized to determine the amount of crush to within one-quarter inch under optimal circumstances and to within one inch under typical circumstances.

## DISCUSSION

**GATHERING AND ANALYZING PHOTOGRAPHIC DATA** – The first step in the process is to determine whether or not there are enough photographs of good quality to perform the photogrammetric analysis. All the following requirements must be met in order for the photogrammetric process to be successful:

**Number of Photographs** – The first photograph depicts the two dimensional aspect of the vehicle; the second photograph provides information about the third dimension. Although it is possible to complete a project with only two photographs as shown in Figure 1, it is advisable to use more. In the example, six photographs were utilized to create a complete three-dimensional model of the vehicle. The purpose of creating a complete three-dimensional model, even though the crush to only the front end is desired, is so that the accuracy of the project can be determined by comparing uncrushed dimensions of the subject vehicle to an exemplar vehicle.

**Photo Separation** – It is important that the photographs show the area of interest from two different camera positions, preferably at right angles to each other. Photographs taken from the same position will not provide enough information about the third dimension and the accuracy of the project will be unacceptable.

**Photo Coverage** – To maximize the accuracy of the project, the area of interest should cover a large portion of the photograph. If points are centered in one small area of the photograph, the accuracy of the project will suffer.

**Photo Quality** – Typically, photographs from a 35mm camera are utilized and the quality of the images is usually good. However the quality of Polaroid photographs is poor, and the accuracy of the project may not be acceptable; therefore it is recommended that the use of Polaroids be limited.

**PHOTOGRAMMETRIC ANALYSIS** – There are several photogrammetric software programs available on the market today. These engineers utilized PhotoModeler [3] to perform the photogrammetric analysis.

Scan Photographs – The first step in the computer process is to scan the photographs of a crushed vehicle into the computer, which can be done utilizing a flatbed scanner. PhotoModeler will accept both color and black and white photographs. It is Knott Laboratory’s experience that color photographs are easier to use when identifying damage, but the file size of the color photographs is approximately three times larger than black and white photographs.

Camera Characteristics – The next step is to input the camera characteristics of the camera that took the photographs. The focal length is an important input value. The vehicle can look quite different while looking through the camera and adjusting the focal length. Knott Laboratory’s experience is that photographs are usually taken with one camera at one focal length. Investigators should input the focal length if it is known. If the focal length is not known, the software has a utility “Inverse Camera” that will assist in determining the camera’s focal length. The camera characteristics can be determined if there are known dimensions in the photographs. This process has been reviewed and published previously by Knott Laboratory, Inc [4].

Identify Similar Points – This is the step in which a three-dimensional computer model is created. In order for the software to determine the three-dimensional position of key points in the photographs, the common points on the photographs must be identified (see Figure 2). The more photographs that are used to identify a selected point, the greater the accuracy; however, a minimum of two photographs must be used to identify a single point in order to create a three-dimensional model.

Process the Information – Once at least seven points have been identified on each photograph, the software is capable of determining the three-dimensional position of the identified points and camera. It is advisable to process the project when between 7 to 10 points have been identified on at least two photographs. If more than 10 points are added, the processing becomes cumbersome because the software is performing an iterative process in which it is repositioning the points and camera positions in space and determining the error after each iteration. With a greater number of points there are often too many solution sets generated by the iterative process for the processing to be successful.

Add Points to Increase Model Detail – In order to increase the detail of the model, additional points can be identified on each of the photographs ensuring that the points show up on at least two different photographs. It is Knott Laboratory’s experience that the project should be

processed after 7 to 10 additional points have been added.

Repeat Steps with Exemplar Vehicle – In order to determine the amount of crush, a comparison between the crushed vehicle and an uncrushed vehicle should be performed and the net crush values should be determined (see Figure 3). The same photogrammetric process can be performed on an exemplar vehicle so that the two vehicles can be compared side by side in three-dimensional space.

**CREATING AND ANALYZING THE THREE-DIMENSIONAL MODELS** –

Prepare Models for Export – To compare the crushed vehicle to the exemplar vehicle, both models can be exported into a separate computer aided drawing (CAD) package such as AutoCAD or 3DStudio. PhotoModeler can create both a mesh model and a textured model for output (see Figures 4 and 5). For documenting crush to the front end of a vehicle, textured models are placed side by side to quantify and compare deformation (see Figure 6). When the crush occurs to the side of a vehicle, mesh models are laid on top of each other to quantify the amount of deformation.

Determining Accuracy of Data – A statistical analysis of the accuracy of the project can be performed comparing the computer models to the actual technical specifications of the vehicles (see Figure 7). This statistical analysis determines the accuracy of the crush measurements, which will affect the accuracy of the equivalent barrier speed. Below is an example of a table quantifying the accuracy.

| Measurement       | Processed Dimension | Physical Dimension | Accuracy |
|-------------------|---------------------|--------------------|----------|
| Length            | 177.2               | 175.0              | 1.2%     |
| Wheel Base        | 104.5               | 103                | 1.5%     |
| Width             | 67.7                | 67                 | 1.0%     |
| Front Track Width | 52.8                | 53                 | 0.4%     |
| Rear Track Width  | 54.2                | 54                 | 0.4%     |
| Height            | 59.8                | 61                 | 2.0%     |
| Average           |                     |                    | 1.1%     |

The maximum amount of crush measured in this project was 12 inches. The accuracy of the measurement is within 1/8<sup>th</sup> of an inch, which is excellent for this project, but not typical in most projects. An accuracy within one inch is achievable under typical circumstances, which is an acceptable level of accuracy for data input into EDCRASH.

## UTILIZING THE THREE-DIMENSIONAL MODEL –

Determining EBS – There are several software programs available on the market to determine equivalent barrier speed (EBS) utilizing crush data. For this process, EDCRASH developed by Engineering Dynamics Corporation [5] was used to calculate EBS. These authors will not discuss the details of how data is input into EDCRASH. This information can be found in the EDCRASH technical manuals [5]. In general, crush data is gathered from the three-dimensional computer model generated from the photogrammetric process (see Figure 8). This data is input into the EDCRASH system along with other vehicle data such as the vehicle stiffness coefficients, weight, and dimensions. Utilizing this information EDCRASH can calculate the amount of energy required to crush the vehicle and subsequently the vehicle equivalent barrier speed (see Figure 9).

Determining Occupant Compartment Dimensions – During many rollover accidents, the vehicle's occupant compartment dimensions change, sometimes crushing the occupant inside. Utilizing this photogrammetric technique to quantify the dimensions of the occupant compartment before and after the accident can assist an engineer in quantifying the amount of change in the occupant compartment. For example, Knott Laboratory was able to quantify the changes in the occupant compartment in a rollover accident involving a Peterbilt tractor (see Figures 10 and 11). In the accident, the occupant was unbelted and was ejected from the tractor during the rollover sequence. By quantifying the changes in the occupant compartment, engineers were able to determine that the occupant compartment was not crushed to the extent that had the driver been seatbelted, he probably could have survived the accident.

Determining Roadway Markings – Not only can three-dimensional objects such as vehicles be measured utilizing this photogrammetric method, two-dimensional objects such as roadway tire marks can be modeled and quantified. This process has been discussed in detail in SAE Paper 970944 [4]. Being able to quantify roadway marks allows engineers to better determine a vehicle's path and speed during an accident sequence.

## CONCLUSION

Utilizing close-range photogrammetric techniques, engineers can measure vehicle crush utilizing photographs instead of physically measuring the vehicle. This method is of great value when the vehicle is no longer available, and photographs are the only documentation of the vehicle damage, which is quite common when an engineer must reconstruct an accident years after the accident occurred. Utilizing close-range photogrammetry, a three-dimensional model of the damaged vehicle can be created, and the crush deformation can be reconstructed

with an accuracy of one inch under typical circumstances. Knowing the crush dimensions allows engineers to calculate a vehicle's equivalent barrier speed and changes in occupant compartment dimensions.

## REFERENCES

1. Moltenbrey, K., "CRASH COURSE – Investigators utilize 3D technology to reconstruct the Princess Diana car accident." June, 1998, Computer Graphics World Magazine.
2. Fenton, S.F., "Reconstructing the Princess Diana Crash," August, 1998, Law Enforcement Technology Magazine.
3. PhotoModeler Pro 3.0, Eos Systems, Inc., Vancouver, B.C., Canada, 1997.
4. Fenton, S.F, Kerr, R.K., "Accident Scene Diagramming Using New Photogrammetric Technique," SAE Paper 970944.
5. EDCRASH Vehicle Analysis Package, Fourth Edition, Engineering Dynamics Corporation, Beaverton, OR, USA, 1989.
6. Crush Stiffness Coefficients for Vehicle Model Years 1960-1994, Neptune Engineering, Clovis, CA, USA, 1994.
7. Ziernicki, R., "The Effect of Variables on Vehicular Accident Reconstruction," Forensic Engineering, The International Journal, Vol. II, No. 3, 1990.

## ABOUT THE AUTHORS

The authors have been utilizing PhotoModeler software since it was first introduced in 1993. The authors can be reached at the following address:

Knott Laboratory, Inc.  
7185 South Tucson Way  
Englewood, Colorado 80219-1605

Phone (303)925-1900  
Fax (303)925-1901  
Email knottlab@ix.netcom.com

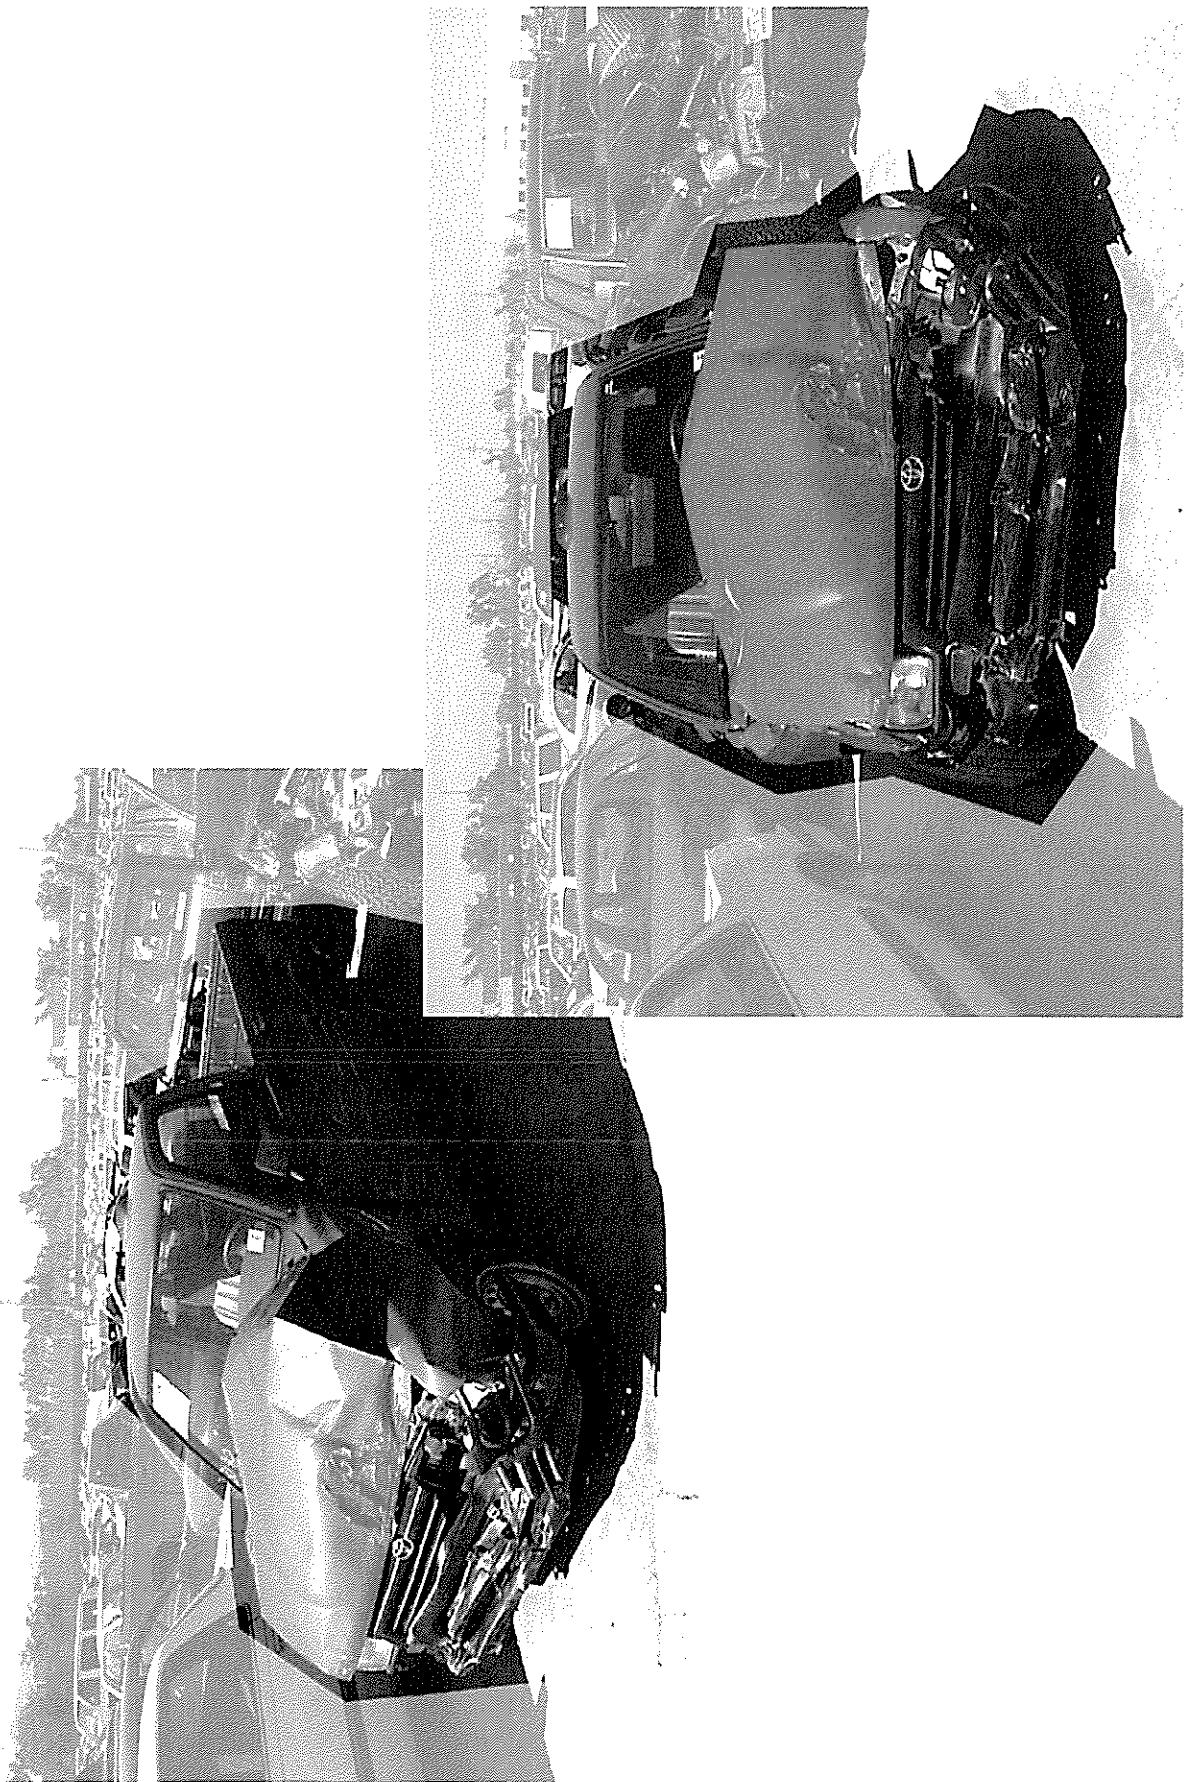


Figure 1. Photos of Damaged Vehicle